

# DATA SHEET

## MCPA-LP-FLAP

### ADDRESSABLE MANUAL CALL POINT LOW PROFILE WITH PROTECTIVE COVER

The MCPA-LP-Flap is a low profile surface mounting addressable manual call point compatible with all GFE Addressable Control panels.




With its enhanced communications mechanism the typical response time is approximately one second, depending on the number of call points connected to the loop. A bi-colour LED flashes Green when the unit is interrogated by the control panel and is illuminated Red when in Alarm.

The command to illuminate the Red LED is emitted by the control panel in response to activation of the individual call point thus confirming that the Alarm signal has been received at the control panel.

The individual address, up to 125, of each call point is set via an eight way DIL switch.

The unit is supplied complete with a hinged flap which protects the trigger element from accidental activation and reduces malicious activations as two actions are required to activate it.

Another convenient feature of the MCPA-LP-Flap is that after an activation the plastic insert is easily reset using the supplied key, replacement is not required.

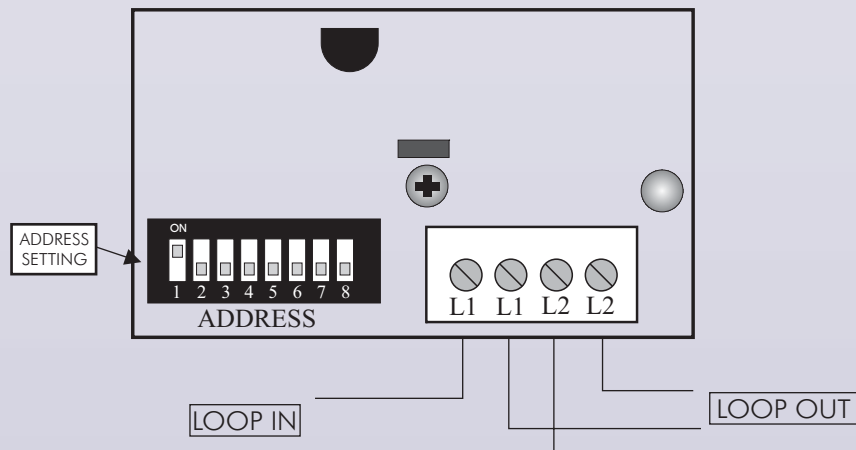

SPECIFICATIONS			
SUPPLY	Loop Power	DIMENSIONS (UNBOXED)	90 x 90 x 28 mm
LOOP CURRENT QUIESCENT	0,35mA	WEIGHT (UNBOXED)	80 grams
LOOP CURRENT MAX (Alarm, LED Illuminated)	3,1mA	OPERATING TEMPERATURE	0-50°C
MAX. RECOMMENDED PER LOOP	30	HUMIDITY	<85%Rh non condensing
MAX CABLE SIZE	2,5 mm <sup>2</sup>	PROTECTION CATEGORY	IP 24
ORDERING INFORMATION			MCPA-LP-FLAP